



KEB030 Biconvex Lenses Ø 3,00 mm.

Code	KEB03001B	KEB03003B	KEB03004B	KEB03006B
Material	PC	PC IR	PMMA	PMMA UV
D (mm)	3,00	3,00	3,00	3,00
d (mm)	2,5	2,5	2,5	2,5
S (mm)	0,25	0,25	0,25	0,25
t (mm)	2,50	2,50	2,50	2,50
h (mm)	2,17	2,17	2,17	2,17
Lambda (nm)	550	850	550	380
EFFL (mm)	8,1	8,4	8,3	8,0
BFL (mm)	7,6	7,8	7,8	7,6

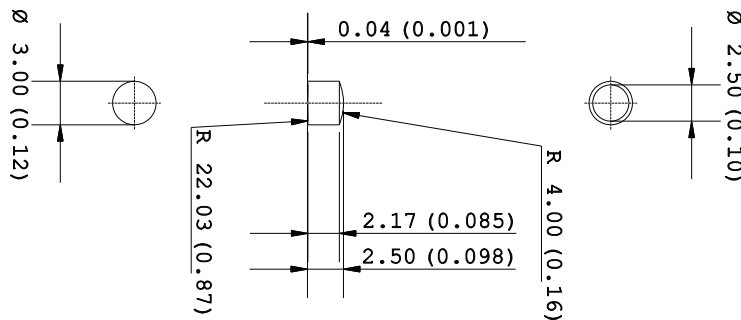

KEB035 Biconvex Lenses Ø 3,50 mm.

Code	KEB03503B	KEB03504B	KEB03506B
Material	PC IR	PMMA	PMMA UV
D (mm)	3,50	3,50	3,50
d (mm)	3,00	3,00	3,00
S (mm)	0,25	0,25	0,25
t (mm)	2,50	2,50	2,50
h (mm)	2,12	2,12	2,12
Lambda (nm)	850	550	380
EFFL (mm)	8,9	10,2	9,9
BFL (mm)	7,8	8,5	8,2

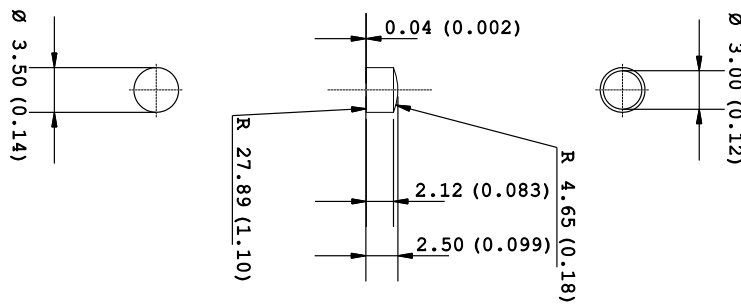

		PC	PC IR	PMMA	PMMA UV
Transmission Factor for transparent material	%	89	-	92	-
Refractive index		1.586	1.586	1.49	1.49
Haze for transparent material	%	< 0.8	-	< 0.5	< 0.5
Tensile modulus	MPa	2400	2400	3300	3300
Yeld stress	MPa	65*	65*	77**	77**
Yeld strain	MPa	6.0*	6.0*	5.5**	5.5**
Glass transition temperature	°C	145	148	117	117
Temperature of deflection under load (1.8 Mpa)	°C	124	125	98	98
Temperature of deflection under load (0.45 Mpa)	°C	137	137	103	103
Density	Kg/m3	1200	1200	1190	1190

* 50 mm/min

** 5 mm/min

Geometric Tolerance

t $t \pm 0,05\%$

R $R \pm 3\%$

D $D \begin{matrix} +0,00 \\ -0,1 \end{matrix}$

EFFL $EFFL \pm 5\%$

BFL $BFL \pm 5\%$