

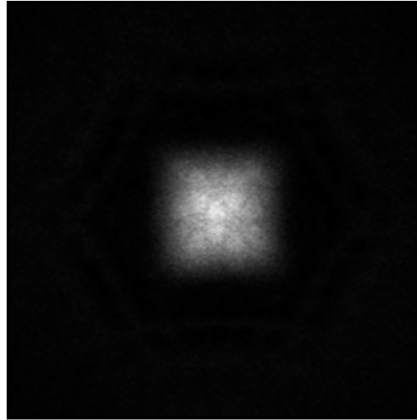
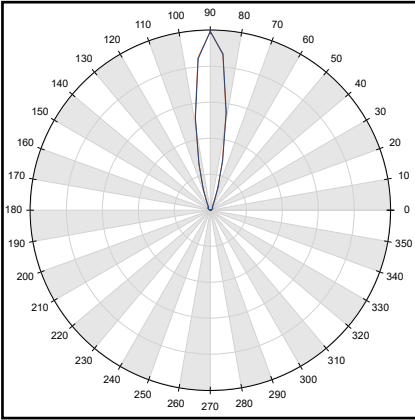


1. KESQ2145NASR - SEOUL® CUN0GB1A-UV CA3535 Series

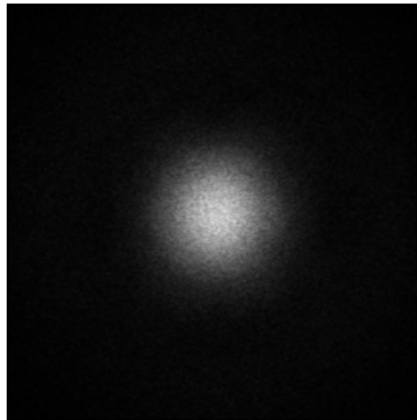



- Full angle C0-C180 at 50% from max: ~ 19.5°
- Full angle C0-C180 at 10% from max: ~ 33.2°
- The light spots here represented refer to tests carried out with ~ 1600mW@LED

1. KESQ2145MESR - SEOUL® CUN0GB1A-UV CA3535 Series

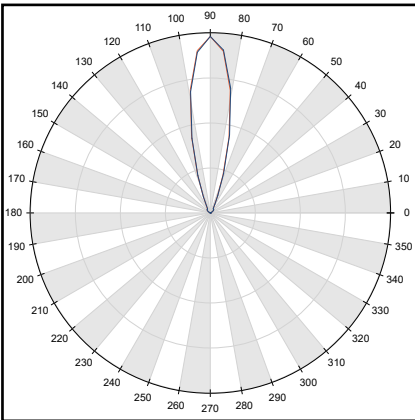

- Full angle C0-C180 at 50% from max: ~ 25.5°
- Full angle C0-C180 at 10% from max: ~ 64.6°
- The light spots here represented refer to tests carried out with ~ 1600mW@LED

1. KESQ2145WISR - SEOUL® CUN0GB1A-UV CA3535 Series

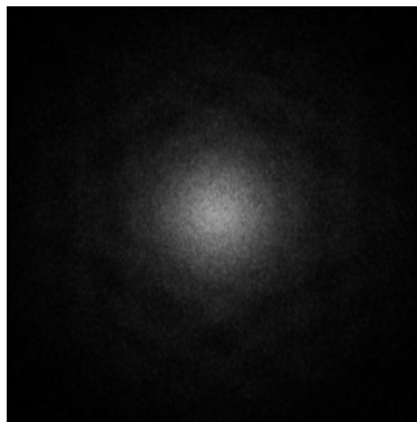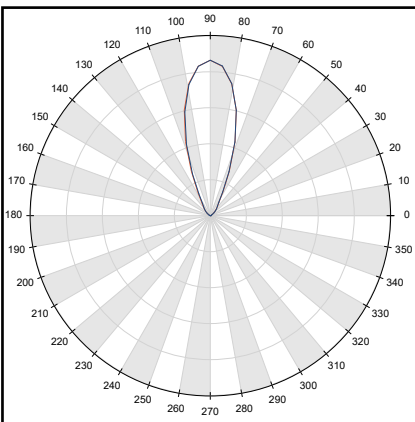

- Full angle C0-C180 at 50% from max: ~ 28.4°
- Full angle C0-C180 at 10% from max: ~ 88.5°
- The light spots here represented refer to tests carried out with ~ 1600mW@LED