


Make up your code

KSP	X	08	X	XX	-XXX
Series	1 = concave	LED diameter	LED color	Operating Voltage	Cable length ** (Standard 200 mm)
				02 05 12 24 48	

** without cable = Z

LED Code	Material	Wave length (nm) Color	Lens Type	Iv (mcd) @ 20mA		Viewing Angle 2θ
				Min	Typ	
C01	GaAsP/GaP	625/Red	Red Diffused	40	100	120°
C02	GaP	565/Green	Green Diffused	20	60	120°
C03	GaAsP/GaP	590/Yellow	Yellow Diffused	20	50	120°
C04	GaAsP/GaP	625/Orange	Orange Diffused	40	100	120°
C05	GaAsP/GaP	625/Red	White diffused	30	80	100°
Bicolor	GaP	565/Green		20	50	

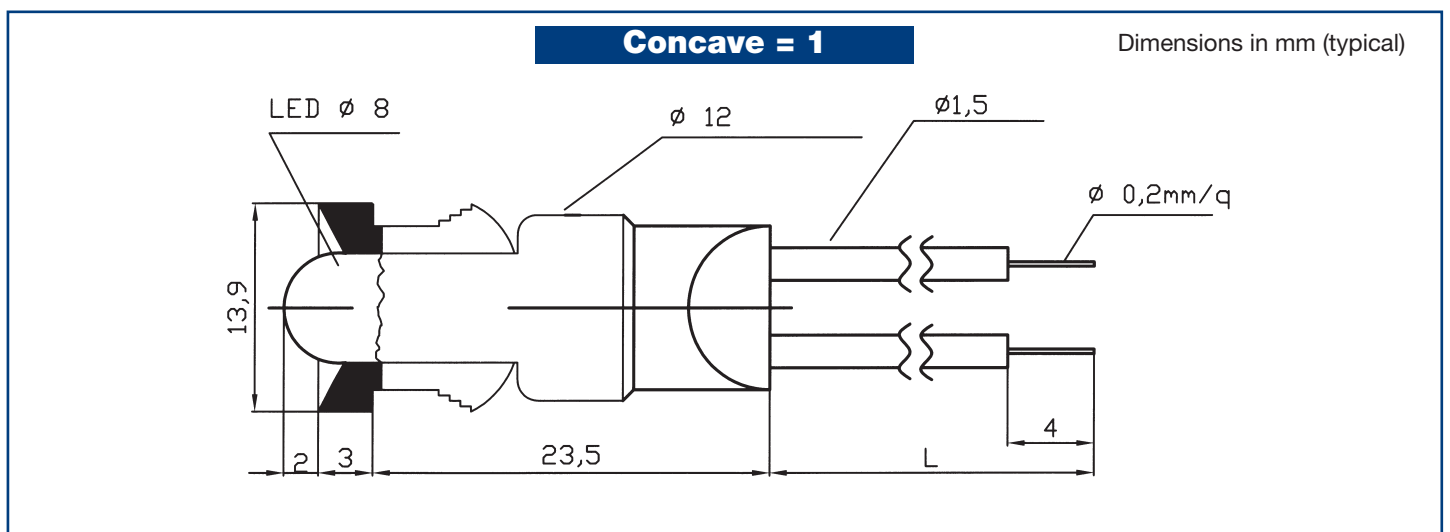

OPTIONS AVAILABLE

- ◆ Special LED on request
- ◆ Ultrabright from 330 to 7000 mcd
- ◆ Bicolor – Tricolor and Full color
- ◆ Different shape
- ◆ Waterproof IP66/67 on request
- ◆ Different operating voltage
- ◆ Customized version on request
- ◆ Blinking LEDs
- ◆ Different color cable (standard + red / - Black)
- ◆ LED case: transparent and water clear
- ◆ Flat top
- ◆ Bicolor tripolar
- ◆ Infrared