

Via Monfalcone, 41 20092 Cinisello Balsamo - Milan - Italy technical@khatod.com Tel. (+39) 02-660-136-95 Fax. (+39) 02-660-135-00

# Test Report

Number: 13000000288

Optics: KEPL155010

Source: SEOUL Z5P



Code Number: 130000000288

## **Contents**

1	Light Source Model	3
2	Measurement Setup	3
3	Results	3
4	Intensity Plot	4
5	Illuminance Map	5
6	Isolux / Isocandela Plots	6
7	Illuminance Diagram	7
8	Drawing	8
9	Materials	9
10	Use and Maintenance	9
11	Disclaimer	9



ighting Code Number: 130000000288

## 1 Light Source Model

Parameter	Symbol	Value	Unit
Lens / Reflector Model	-	KEPL155010	-
Material (More info on page 9)	-	PC Holder / PMMA Lens	-
Dimensions	-	See page 8	-
Source Model	-	SEOUL Z5P	-
Number of Sources	N	6	-
Power Supply Type	-	ISO TECH ISP3303	-
Driver Type	-	-	-
Driving Voltage	$V_F$	-	V
Driving Current	$I_F$	350	mA
Nominal Flux	Φ	120×6	lm

## 2 Measurement Setup

Parameter	Symbol	Value	Unit
Operator	-	Simone Bassi	-
Goniophotometer Type	-	KLX12M	-
Measurement Distance	Z	5	m
Room Temperature	T	25	°C
Date	-	07-Feb-2013	-

#### 3 Results


Parameter	Symbol	Value	Unit
Total Flux	Ф	360	lm
Max Intensity	I <sub>max</sub>	943	cd
Max Illuminance at 5 m	$E_{\rm max}$	37	lx
C-Viewing Angle at 50% I <sub>max</sub>	2φ <sub>C</sub>	26	0
$\gamma$ -Viewing Angle at 50% $I_{\rm max}$	2φγ	26	0
C-Viewing Angle at 10% I <sub>max</sub>	2φ <sub>C10%</sub>	56	0
$\gamma$ -Viewing Angle at $10\%I_{\text{max}}$	2φ <sub>γ10%</sub>	56	0
General Optical Measurement Tolerance	-	±10%	-


#### NOTES:

- Intensity (I) and illuminance (E) data are normalized by 1000 lm
- The optical values shown are the result of optical simulations carried out with ASAP and ZEMAX software systems. The optical simulations are carried out on the basis of the typical values provided in the LED manufacturers' official datasheets. The photometric analysis has been carried out on physical samples. On request, by supplying your PCB, we can provide the measurement photometric file.



# 4 Intensity Plot

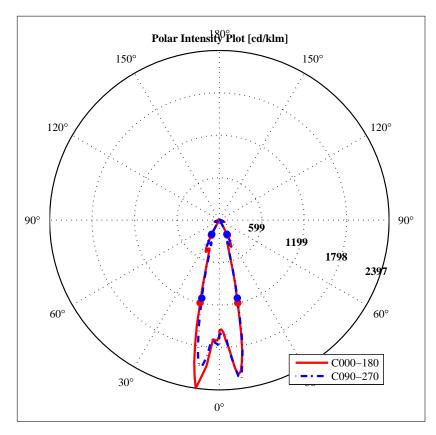


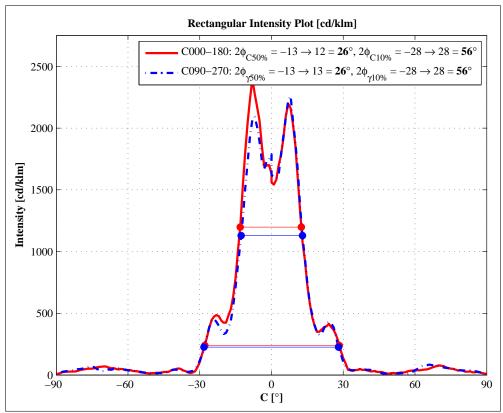


www.khatod.com technical@khatod.com 4



# 5 Illuminance Map

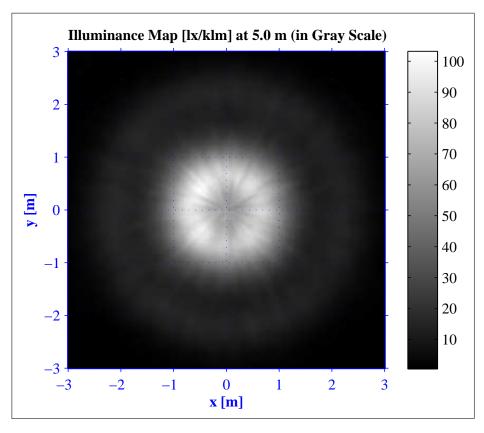


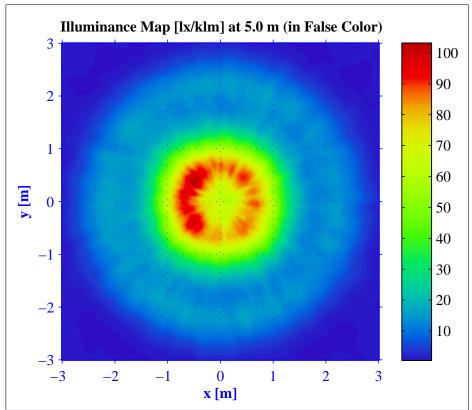


www.khatod.com technical@khatod.com 5



## 6 Isolux / Isocandela Plots

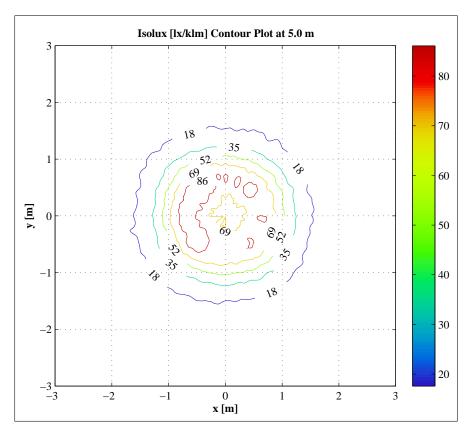


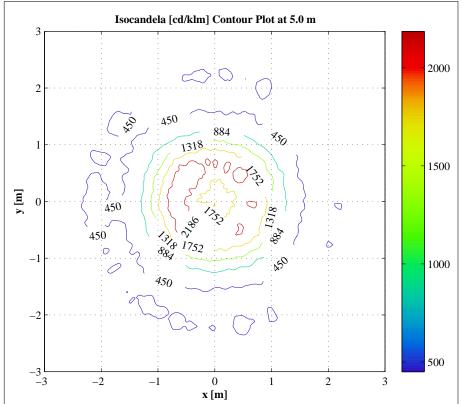


www.khatod.com technical@khatod.com 6




# 7 Illuminance Diagram

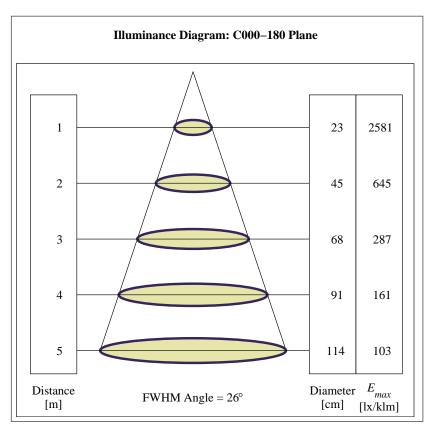

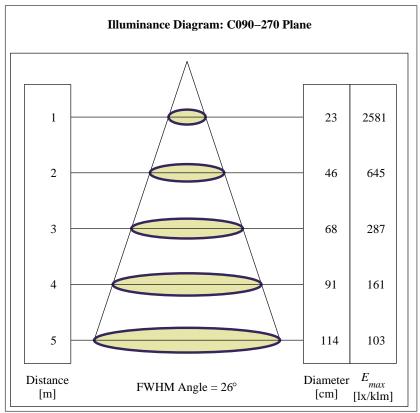



# 8 Drawing

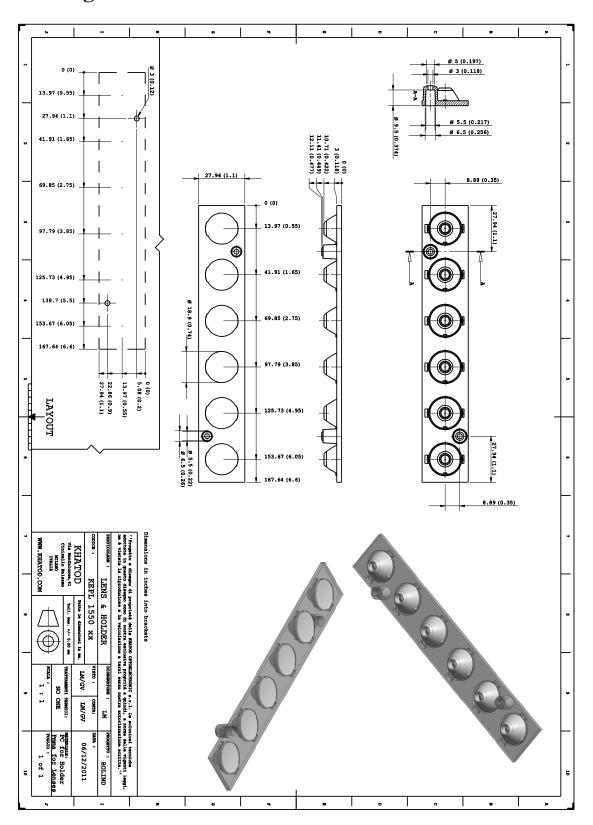



9 Materials

Material	Top	T <sub>stg</sub>
PMMA	-40°···85°C	-40°···85°C
PC	-40°···120°C	-40°···120°C
PC + Aluminum Coating with	-40°···120°C	-40°···120°C
protective Clear Coat		
APEC + Aluminum Coating	-40°···180°C	-40°···180°C
with protective Clear Coat		
ABS	$-35^{\circ}\cdots70^{\circ}C$	-35°···70°C

Code Number: 130000000288

#### 10 Use and Maintenance

- DO NOT HANDLE OR INSTALL LENSES WITHOUT WEARING GLOVES, SKIN OILS MAY DAMAGE LENS OR LIGHT TRANSMISSION;
- CLEAN LENSES WITH MILD SOAP AND WATER AND A SOFT CLOTH:
- DO NOT USE ANY COMMERCIAL CLEANING SOLVENTS ON LENSES.

#### 11 Disclaimer

Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specification described in the section Results on page 3. Should you require further information, please contact Khatod for advice. All lens testing must be subject to identical conditions as Khatod test condition.

Khatod Optoelectronic, Milan, Italy, manufactures lenses for LEDs. Any other use of the lens shall void our liability and warranty. The lenses are an inert component to be used in the manufacture of various products. Our warranty and liability are limited only to the manufacture of the lens. You may not modify, copy, distribute reproduce, license or alter the lens and related materials of Khatod. Khatod does not warrant against damages or defects arising out of the use or misuse of the products; against defects or damage arising from improper installation, or against defects in the product or in its components. No warranty of any kind, expressed or implied, is made regarding the safety of the products. The entire risk as to the quality or performance of the product is with the buyer. In no event shall Khatod be liable for any direct, indirect, punitive, incidental, special, consequential damages, or any damages whatsoever arising out of or connected with the use or misuse of the product. Khatod shall not have any obligation with respect to the product or any part thereof, whether based on contract, tort, strict liability or otherwise. Buyer assumes all risks and liability from use of the product. The laws of Milan, Italy govern this product warranty and liability and you hereby consent to the exclusive jurisdiction and venue of courts in Milan, Italy in all disputes arising out of or relating to the use of this product. Production, marketing, distribution, sale of these products as well as their possible modifications and variations are only exclusive right of Khatod Optoelectronic. No company can perform any of these actions without written permission released by Khatod Optoelectronic.

The information contained in this document is proprietary of Khatod Optoelectronic and may change without notice.

REPRODUCTION PROHIBITED.