



## KEB080 Biconvex Lenses Ø 8,00 mm.

Code	KEB08001B	KEB08003B	KEB08004B	KEB08006B
Material	PC	PC IR	PMMA	PMMA UV
D (mm)	8,00	8,00	8,00	8,00
d (mm)	6,50	6,50	6,50	6,50
S (mm)	0,75	0,75	0,75	0,75
t (mm)	4,50	4,50	4,50	4,50
h (mm)	2,56	2,56	2,56	2,56
Lambda (nm)	550	850	550	380
EFFL (mm)	8,5	8,8	10,4	10,1
BFL (mm)	6,8	7,1	8,9	8,6

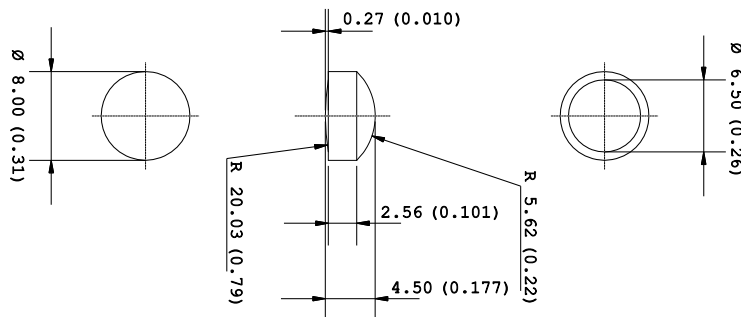

## KEB085 Biconvex Lenses Ø 8,50 mm.

Code	KEB08501B	KEB08503B	KEB08504B	KEB08506B
Material	PC	PC IR	PMMA	PMMA UV
D (mm)	8,50	8,50	8,50	8,50
d (mm)	7,00	7,00	7,00	7,00
S (mm)	0,75	0,75	0,75	0,75
t (mm)	4,50	4,50	4,50	4,50
h (mm)	2,42	2,42	2,42	2,42
Lambda (nm)	550	850	550	380
EFFL (mm)	9,1	9,4	10,0	9,7
BFL (mm)	7,9	8,2	8,9	8,6

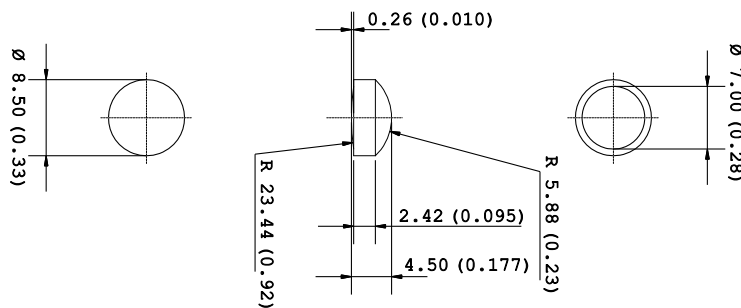

		PC	PC IR	PMMA	PMMA UV
Transmission Factor for transparent material	%	89	-	92	-
Refractive index		1.586	1.586	1.49	1.49
Haze for transparent material	%	< 0.8	-	< 0.5	< 0.5
Tensile modulus	MPa	2400	2400	3300	3300
Yeld stress	MPa	65*	65*	77**	77**
Yeld strain	MPa	6.0*	6.0*	5.5**	5.5**
Glass transition temperature	°C	145	148	117	117
Temperature of deflection under load (1.8 Mpa)	°C	124	125	98	98
Temperature of deflection under load (0.45 Mpa)	°C	137	137	103	103
Density	Kg/m3	1200	1200	1190	1190

\* 50 mm/min

\*\* 5 mm/min

## Geometric Tolerance

**t**       $t \pm 0,05\%$

**R**       $R \pm 3\%$

**D**       $D \begin{matrix} +0,00 \\ -0,1 \end{matrix}$

**EFFL**       $EFFL \pm 5\%$

**BFL**       $BFL \pm 5\%$